


Kettenräder SB

DIN-Nr. 8187/ISO 606
 Teilung 1/2" x 5/16"
 12,7 x 7,75mm
 Rolle 8,51mm, 08B-1

- Kettenräder mit induktiv gehärteten Zähnen (HRC 50)
- Mit Fertigbohrung H7, Rauhtiefe 1,6
- Nut nach DIN-Nr. 6885/1, auf Zahnspitze, Nutbreite H9
- Zwei Gewinde, einmal auf Nut, einmal um 90° versetzt

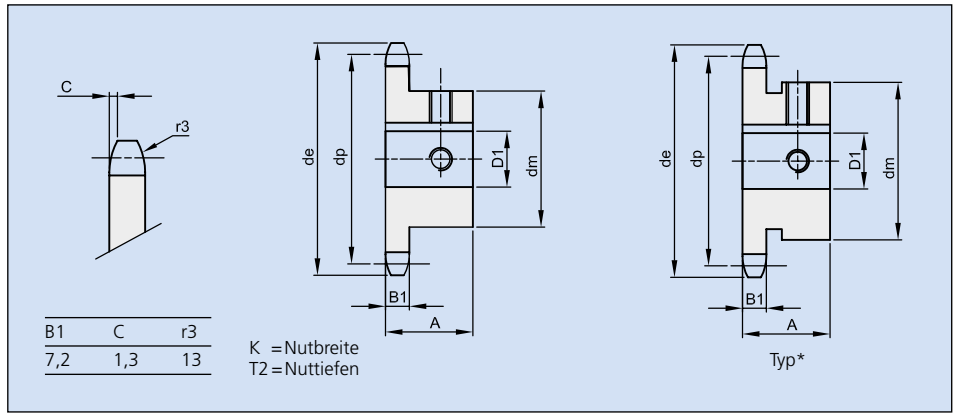

Artikel-Nr. Ketten Fuchs	Zähne- zahl z	Abmessungen in mm							Gewinde M
		de	dp	dm	D1 (H7)	A	K (H9)	T2	
321240010SB15	10	45,9	41,10	31,0*	15,0	25,0	5,0	2,3	4
321240010SB16	10	45,9	41,10	31,0*	16,0	25,0	5,0	2,3	4
321240011SB14	11	49,9	45,07	29,0	14,0	25,0	5,0	2,3	4
321240011SB15	11	49,9	45,07	31,0*	15,0	25,0	5,0	2,3	4
321240011SB16	11	49,9	45,07	31,0*	16,0	25,0	5,0	2,3	4
321240011SB18	11	49,9	45,07	37,0*	18,0	25,0	6,0	2,8	5
321240012SB12	12	53,9	49,07	33,0	12,0	28,0	4,0	1,8	4
321240012SB14	12	53,9	49,07	33,0	14,0	28,0	5,0	2,3	4
321240012SB15	12	53,9	49,07	33,0	15,0	28,0	5,0	2,3	4
321240012SB16	12	53,9	49,07	33,0	16,0	28,0	5,0	2,3	4
321240012SB18	12	53,9	49,07	33,0	18,0	28,0	5,0	2,8	5
321240012SB19	12	53,9	49,07	33,0	19,0	28,0	6,0	2,8	5
321240012SB20	12	53,9	49,07	33,0	20,0	28,0	6,0	2,8	5
321240012SB25	12	53,9	49,07	42,0*	25,0	28,0	8,0	3,3	6
321240013SB12	13	57,9	53,06	37,0	12,0	28,0	4,0	1,8	4
321240013SB14	13	57,9	53,06	37,0	14,0	28,0	5,0	2,3	4
321240013SB15	13	57,9	53,06	37,0	15,0	28,0	5,0	2,3	4
321240013SB16	13	57,9	53,06	37,0	16,0	28,0	5,0	2,3	4
321240013SB18	13	57,9	53,06	37,0	18,0	28,0	6,0	2,8	5
321240013SB19	13	57,9	53,06	37,0	19,0	28,0	6,0	2,8	5
321240013SB20	13	57,9	53,06	37,0	20,0	28,0	6,0	2,8	5
321240013SB22	13	57,9	53,06	37,0	22,0	28,0	6,0	2,8	5
321240013SB24	13	57,9	53,06	37,0	24,0	28,0	8,0	3,3	6
321240013SB25	13	57,9	53,06	42,0*	25,0	28,0	8,0	3,3	6
321240013SB28	13	57,9	53,06	45,0*	28,0	28,0	8,0	3,3	6
321240014SB14	14	61,6	57,07	41,0	14,0	28,0	5,0	2,3	4
321240014SB15	14	61,6	57,07	41,0	15,0	28,0	5,0	2,3	4
321240014SB16	14	61,6	57,07	41,0	16,0	28,0	5,0	2,3	4
321240014SB18	14	61,6	57,07	41,0	18,0	28,0	6,0	2,8	5
321240014SB19	14	61,6	57,07	41,0	19,0	28,0	6,0	2,8	5
321240014SB20	14	61,6	57,07	41,0	20,0	28,0	6,0	2,8	5
321240014SB22	14	61,6	57,07	41,0	22,0	28,0	6,0	2,8	5
321240014SB24	14	61,6	57,07	41,0	24,0	28,0	8,0	3,3	6
321240014SB25	14	61,6	57,07	41,0	25,0	28,0	8,0	3,3	6
321240014SB28	14	61,6	57,07	48,0*	28,0	28,0	8,0	3,3	6
321240015SB14	15	65,9	61,09	45,0	14,0	28,0	5,0	2,3	4
321240015SB15	15	65,9	61,09	45,0	15,0	28,0	5,0	2,3	4
321240015SB16	15	65,9	61,09	45,0	16,0	28,0	5,0	2,3	4
321240015SB18	15	65,9	61,09	45,0	18,0	28,0	6,0	2,8	5
321240015SB19	15	65,9	61,09	45,0	19,0	28,0	6,0	2,8	5
321240015SB20	15	65,9	61,09	45,0	20,0	28,0	6,0	2,8	5
321240015SB22	15	65,9	61,09	45,0	22,0	28,0	6,0	2,8	5
321240015SB24	15	65,9	61,09	45,0	24,0	28,0	8,0	3,3	6

Artikel-Nr. Ketten Fuchs	Zähne- zahl z	Abmessungen in mm							Gewinde M
		de	dp	dm	D1 (H7)	A	K (H9)	T2	
321240015SB25	15	65,9	61,09	45,0	25,0	28,0	8,0	3,3	6
321240015SB28	15	65,9	61,09	45,0	28,0	28,0	8,0	3,3	6
321240015SB30	15	65,9	61,09	45,0	30,0	28,0	8,0	3,3	6
321240016SB15	16	69,5	65,10	50,0	15,0	28,0	5,0	2,3	4
321240016SB16	16	69,5	65,10	50,0	16,0	28,0	5,0	2,3	4
321240016SB18	16	69,5	65,10	50,0	18,0	28,0	6,0	2,8	5
321240016SB19	16	69,5	65,10	50,0	19,0	28,0	6,0	2,8	5
321240016SB20	16	69,5	65,10	50,0	20,0	28,0	6,0	2,8	5
321240016SB22	16	69,5	65,10	50,0	22,0	28,0	6,0	2,8	5
321240016SB24	16	69,5	65,10	50,0	24,0	28,0	8,0	3,3	6
321240016SB25	16	69,5	65,10	50,0	25,0	28,0	8,0	3,3	6
321240016SB28	16	69,5	65,10	50,0	28,0	28,0	8,0	3,3	6
321240016SB30	16	69,5	65,10	50,0	30,0	28,0	8,0	3,3	6
321240017SB15	17	74,0	69,11	52,0	15,0	28,0	5,0	2,3	4
321240017SB16	17	74,0	69,11	52,0	16,0	28,0	5,0	2,3	4
321240017SB18	17	74,0	69,11	52,0	18,0	28,0	6,0	2,8	5
321240017SB19	17	74,0	69,11	52,0	19,0	28,0	6,0	2,8	5
321240017SB20	17	74,0	69,11	52,0	20,0	28,0	6,0	2,8	5
321240017SB22	17	74,0	69,11	52,0	22,0	28,0	6,0	2,8	5
321240017SB24	17	74,0	69,11	52,0	24,0	28,0	8,0	3,3	6
321240017SB25	17	74,0	69,11	52,0	25,0	28,0	8,0	3,3	6
321240017SB28	17	74,0	69,11	52,0	28,0	28,0	8,0	3,3	6
321240017SB30	17	74,0	69,11	52,0	30,0	28,0	8,0	3,3	6
321240018SB16	18	77,8	73,14	56,0	16,0	28,0	5,0	2,3	4
321240018SB18	18	77,8	73,14	56,0	18,0	28,0	6,0	2,8	5
321240018SB19	18	77,8	73,14	56,0	19,0	28,0	6,0	2,8	5
321240018SB20	18	77,8	73,14	56,0	20,0	28,0	6,0	2,8	5
321240018SB22	18	77,8	73,14	56,0	22,0	28,0	6,0	2,8	5
321240018SB24	18	77,8	73,14	56,0	24,0	28,0	8,0	3,3	6
321240018SB25	18	77,8	73,14	56,0	25,0	28,0	8,0	3,3	6
321240018SB28	18	77,8	73,14	56,0	28,0	28,0	8,0	3,3	6
321240018SB30	18	77,8	73,14	56,0	30,0	28,0	8,0	3,3	6
321240018SB32	18	77,8	73,14	56,0	32,0	28,0	10,0	3,3	8
321240018SB35	18	77,8	73,14	56,0	35,0	28,0	10,0	3,3	8
321240019SB19	19	82,0	77,16	60,0	19,0	28,0	6,0	2,8	5
321240019SB20	19	82,0	77,16	60,0	20,0	28,0	6,0	2,8	5
321240019SB22	19	82,0	77,16	60,0	22,0	28,0	6,0	2,8	5
321240019SB24	19	82,0	77,16	60,0	24,0	28,0	8,0	3,3	6
321240019SB25	19	82,0	77,16	60,0	25,0	28,0	8,0	3,3	6
321240019SB28	19	82,0	77,16	60,0	28,0	28,0	8,0	3,3	6
321240019SB30	19	82,0	77,16	60,0	30,0	28,0	8,0	3,3	6
321240019SB32	19	82,0	77,16	60,0	32,0	28,0	10,0	3,3	8
321240019SB35	19	82,0	77,16	60,0	35,0	28,0	10,0	3,3	8