






HTD-Zahnriemenscheiben für Taper-Spannbuchsen

14M (Teilung = 14 mm) – für Zahnriemenbreite = 40 mm

| Artikel-Nr. Ketten Fuchs | Zähne- zahl | Typ | Werk- stoff | Buchse | Abmessungen in mm | | | | | | | |
|-----------------------------|----------------|-----|----------------|--------|-------------------|---------|-------|--------|-------|------|------|-------|
| | | | | | de | dp | dm | Di | df | W | E | L |
| TL28-14M-40 | 28 | 4F | St | 2012 | 122,12 | 124,78 | - | 94,0 | 128,0 | 54,0 | 11,0 | 32,0 |
| TL29-14M-40 | 29 | 4F | St | 2012 | 126,57 | 129,23 | - | 98,0 | 138,0 | 54,0 | 11,0 | 32,0 |
| TL30-14M-40 | 30 | 4F | St | 2012 | 130,99 | 133,69 | - | 98,0 | 138,0 | 54,0 | 11,0 | 32,0 |
| TL32-14M-40 | 32 | 4F | St | 2012 | 139,88 | 142,60 | - | 108,0 | 154,0 | 54,0 | 11,0 | 32,0 |
| TL34-14M-40 | 34 | 4F | St | 2517 | 148,79 | 151,52 | - | 110,0 | 160,0 | 54,0 | 4,5 | 45,0 |
| TL36-14M-40 | 36 | 4F | St | 2517 | 157,68 | 160,43 | - | 120,0 | 168,0 | 54,0 | 4,5 | 45,0 |
| TL38-14M-40 | 38 | 4F | St | 2517 | 166,60 | 169,34 | - | 130,0 | 183,0 | 54,0 | 4,5 | 45,0 |
| TL40-14M-40 | 40 | 4F | St | 2517 | 175,49 | 178,25 | - | 138,0 | 188,0 | 54,0 | 4,5 | 45,0 |
| TL44-14M-40 | 44 | 4F | St | 3020 | 193,28 | 196,08 | - | 155,0 | 211,0 | 54,0 | 1,5 | 51,0 |
| TL48-14M-40 | 48 | 4F | St | 3020 | 211,11 | 213,90 | - | 170,0 | 226,0 | 54,0 | 1,5 | 51,0 |
| TL56-14M-40 | 56 | 4F | St | 3020 | 246,76 | 249,55 | - | 208,0 | 256,0 | 54,0 | 1,5 | 51,0 |
| TL64-14M-40 | 64 | 9WF | GG | 3020 | 282,41 | 285,21 | 170,0 | 240,0 | 296,0 | 54,0 | 1,5 | 51,0 |
| TL72-14M-40 | 72 | 9W | GG | 3020 | 318,06 | 320,86 | 170,0 | 280,0 | - | 54,0 | 1,5 | 51,0 |
| TL80-14M-40 | 80 | 9A | GG | 3020 | 353,71 | 356,51 | 170,0 | 315,0 | - | 54,0 | 1,5 | 51,0 |
| TL90-14M-40 | 90 | 9A | GG | 3020 | 398,28 | 401,07 | 170,0 | 360,0 | - | 54,0 | 1,5 | 51,0 |
| TL112-14M-40 | 112 | 9A | GG | 3020 | 496,32 | 499,11 | 170,0 | 457,0 | - | 54,0 | 1,5 | 51,0 |
| TL144-14M-40 | 144 | 9A | GG | 3020 | 638,92 | 641,71 | 170,0 | 600,0 | - | 54,0 | 1,5 | 51,0 |
| TL168-14M-40 | 168 | 9A | GG | 3020 | 745,87 | 748,66 | 170,0 | 706,0 | - | 54,0 | 1,5 | 51,0 |
| TL192-14M-40 | 192 | 9A | GG | 3020 | 852,82 | 855,62 | 170,0 | 813,0 | - | 54,0 | 1,5 | 51,0 |
| TL216-14M-40 | 216 | 9A | GG | 3020 | 959,76 | 962,57 | 170,0 | 920,0 | - | 54,0 | 1,5 | 51,0 |
| TL264-14M-40 | 264 | 7A | GG | 4040 | 1173,66 | 1176,47 | 230,0 | 1133,0 | - | 54,0 | 24,0 | 102,0 |

14M (Teilung = 14 mm) – für Zahnriemenbreite = 55 mm

| Artikel-Nr. Ketten Fuchs | Zähne- zahl | Typ | Werk- stoff | Buchse | Abmessungen in mm | | | | | | | |
|-----------------------------|----------------|-----|----------------|--------|-------------------|---------|-------|--------|-------|------|------|-------|
| | | | | | de | dp | dm | Di | df | W | E | L |
| TL28-14M-55 | 28 | 4F | St | 2012 | 122,12 | 124,78 | - | 94,0 | 128,0 | 70,0 | 19,0 | 32,0 |
| TL29-14M-55 | 29 | 4F | St | 2012 | 126,57 | 129,23 | - | 100,0 | 138,0 | 70,0 | 19,0 | 32,0 |
| TL30-14M-55 | 30 | 4F | St | 2517 | 130,99 | 133,69 | - | 100,0 | 138,0 | 70,0 | 12,5 | 45,0 |
| TL32-14M-55 | 32 | 4F | St | 2517 | 139,88 | 142,60 | - | 108,0 | 154,0 | 70,0 | 12,5 | 45,0 |
| TL34-14M-55 | 34 | 4F | St | 2517 | 148,79 | 151,52 | - | 110,0 | 160,0 | 70,0 | 12,5 | 45,0 |
| TL36-14M-55 | 36 | 4F | St | 2517 | 157,68 | 160,43 | - | 120,0 | 168,0 | 70,0 | 12,5 | 45,0 |
| TL38-14M-55 | 38 | 4F | St | 2517 | 166,60 | 169,34 | - | 130,0 | 183,0 | 70,0 | 12,5 | 45,0 |
| TL40-14M-55 | 40 | 4F | St | 2517 | 175,49 | 178,25 | - | 138,0 | 188,0 | 70,0 | 12,5 | 45,0 |
| TL44-14M-55 | 44 | 4F | St | 3020 | 193,28 | 196,08 | - | 155,0 | 211,0 | 70,0 | 9,5 | 51,0 |
| TL48-14M-55 | 48 | 4F | St | 3020 | 211,11 | 213,90 | - | 170,0 | 226,0 | 70,0 | 9,5 | 51,0 |
| TL56-14M-55 | 56 | 4F | St | 3020 | 246,76 | 249,55 | - | 208,0 | 256,0 | 70,0 | 9,5 | 51,0 |
| TL64-14M-55 | 64 | 9WF | GG | 3020 | 282,41 | 285,21 | 170,0 | 240,0 | 296,0 | 70,0 | 9,5 | 51,0 |
| TL72-14M-55 | 72 | 9W | GG | 3020 | 318,06 | 320,86 | 170,0 | 280,0 | - | 70,0 | 9,5 | 51,0 |
| TL80-14M-55 | 80 | 9A | GG | 3020 | 353,71 | 356,51 | 170,0 | 315,0 | - | 70,0 | 9,5 | 51,0 |
| TL90-14M-55 | 90 | 9A | GG | 3020 | 398,28 | 401,07 | 170,0 | 360,0 | - | 70,0 | 9,5 | 51,0 |
| TL112-14M-55 | 112 | 9A | GG | 3020 | 496,32 | 499,11 | 170,0 | 457,0 | - | 70,0 | 9,5 | 51,0 |
| TL144-14M-55 | 144 | 9A | GG | 3020 | 638,92 | 641,71 | 170,0 | 600,0 | - | 70,0 | 9,5 | 51,0 |
| TL168-14M-55 | 168 | 9A | GG | 3020 | 745,87 | 748,66 | 170,0 | 706,0 | - | 70,0 | 9,5 | 51,0 |
| TL192-14M-55 | 192 | 9A | GG | 3020 | 852,82 | 855,62 | 170,0 | 813,0 | - | 70,0 | 9,5 | 51,0 |
| TL216-14M-55 | 216 | 7A | GG | 3535 | 959,76 | 962,57 | 170,0 | 920,0 | - | 70,0 | 9,5 | 89,0 |
| TL264-14M-55 | 264 | 7A | GG | 4040 | 1173,66 | 1176,47 | 230,0 | 1133,0 | - | 70,0 | 16,0 | 102,0 |

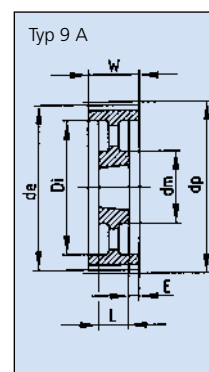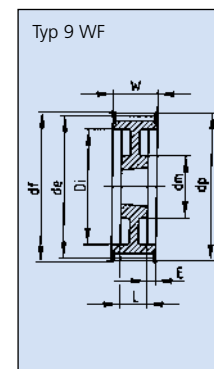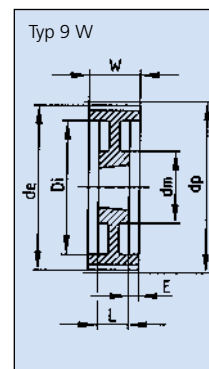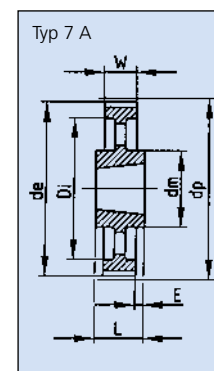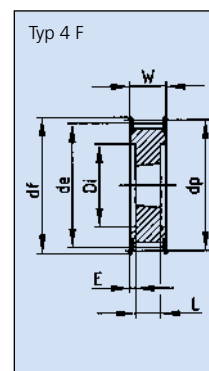

Bestellbeispiel

| | | | |
|------|------|----|---------------------|
| TL48 | 14 M | 25 | Zähnezahl 48 |
| | | | Riementeilung 14 mm |
| | | | Riemenbreite 40 mm |