
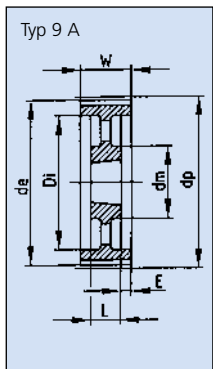
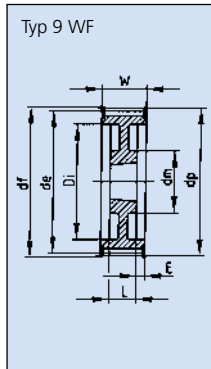
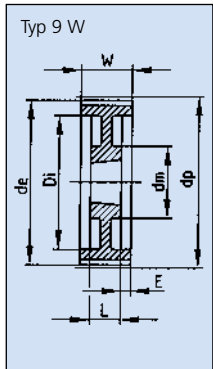
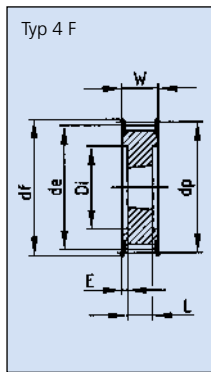


HTD-Zahnriemenscheiben für Taper-Spannbuchsen

14M (Teilung = 14 mm) – für Zahnriemenbreite = 85 mm

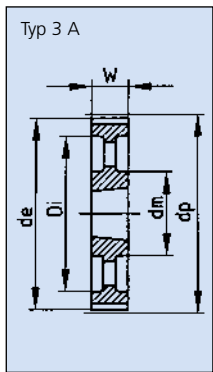

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Buchse	Abmessungen in mm							
					de	dp	dm	Di	df	W	E	L
TL28-14M-85	28	4F	St	2517	122,12	124,78	-	98,0	128,0	102,0	28,5	45,0
TL29-14M-85	29	4F	St	2517	126,57	129,23	-	100,0	138,0	102,0	28,5	45,0
TL30-14M-85	30	4F	St	2517	130,99	133,69	-	100,0	138,0	102,0	28,5	45,0
TL32-14M-85	32	4F	St	2517	139,88	142,60	-	108,0	154,0	102,0	28,5	45,0
TL34-14M-85	34	4F	St	2517	148,79	151,52	-	110,0	160,0	102,0	28,5	45,0
TL36-14M-85	36	4F	St	3020	157,68	160,43	-	125,0	168,0	102,0	25,5	51,0
TL38-14M-85	38	4F	St	3020	166,60	169,34	-	130,0	183,0	102,0	25,5	51,0
TL40-14M-85	40	4F	St	3020	175,49	178,25	-	138,0	188,0	102,0	25,5	51,0
TL44-14M-85	44	4F	St	3020	193,28	196,08	-	153,0	211,0	102,0	25,5	51,0
TL48-14M-85	48	4F	St	3020	211,11	213,90	-	171,0	226,0	102,0	25,5	51,0
TL56-14M-85	56	4F	St	3525	246,76	249,55	-	210,0	256,0	102,0	18,5	65,0
TL64-14M-85	64	9WF	GG	3525	282,41	285,21	190,0	240,0	296,0	102,0	18,5	65,0
TL72-14M-85	72	9W	GG	3525	318,06	320,86	190,0	280,0	-	102,0	18,5	65,0
TL80-14M-85	80	9A	GG	3525	353,71	356,51	190,0	315,0	-	102,0	18,5	65,0
TL90-14M-85	90	9A	GG	3525	398,28	401,07	190,0	360,0	-	102,0	18,5	65,0
TL112-14M-85	112	9A	GG	3525	496,32	499,11	190,0	457,0	-	102,0	18,5	65,0
TL144-14M-85	144	9A	GG	3525	638,92	641,71	190,0	600,0	-	102,0	18,5	65,0
TL168-14M-85	168	9A	GG	3525	745,87	748,66	190,0	706,0	-	102,0	18,5	65,0
TL192-14M-85	192	3A	GG	4040	852,82	855,62	230,0	813,0	-	102,0	-	-
TL216-14M-85	216	3A	GG	4040	959,76	962,57	230,0	920,0	-	102,0	-	-
TL264-14M-85	264	3A	GG	4040	1173,66	1176,47	230,0	1133,0	-	102,0	-	-

14M (Teilung = 14 mm) – für Zahnriemenbreite = 115 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Buchse	Abmessungen in mm							
					de	dp	dm	Di	df	W	E	L
TL28-14M-115	28	4F	St	2517	122,12	124,78	-	98,0	128,0	133,0	44,0	45,0
TL29-14M-115	29	4F	St	2517	126,57	129,23	-	100,0	138,0	133,0	44,0	45,0
TL30-14M-115	30	4F	St	2517	130,99	133,69	-	100,0	138,0	133,0	44,0	45,0
TL32-14M-115	32	4F	St	2517	139,88	142,60	-	108,0	154,0	133,0	44,0	45,0
TL34-14M-115	34	4F	St	2517	148,79	151,52	-	110,0	160,0	133,0	44,0	45,0
TL36-14M-115	36	4F	St	3020	157,68	160,43	-	125,0	168,0	133,0	41,0	51,0
TL38-14M-115	38	4F	St	3020	166,60	169,34	-	130,0	183,0	133,0	41,0	51,0
TL40-14M-115	40	4F	St	3020	175,49	178,25	-	138,0	188,0	133,0	41,0	51,0
TL44-14M-115	44	4F	St	3030	193,28	196,08	-	155,0	211,0	133,0	28,5	76,0
TL48-14M-115	48	4F	St	3030	211,11	213,90	-	170,0	226,0	133,0	28,5	76,0
TL56-14M-115	56	4F	St	3535	246,76	249,55	-	210,0	256,0	133,0	22,0	89,0
TL64-14M-115	64	9WF	GG	3535	282,41	285,21	190,0	240,0	296,0	133,0	22,0	89,0
TL72-14M-115	72	9W	GG	3535	318,06	320,86	190,0	280,0	-	133,0	22,0	89,0
TL80-14M-115	80	9A	GG	3535	353,71	356,51	190,0	315,0	-	133,0	22,0	89,0
TL90-14M-115	90	9A	GG	3535	398,28	401,07	190,0	360,0	-	133,0	22,0	89,0
TL112-14M-115	112	9A	GG	3535	496,32	499,11	190,0	457,0	-	133,0	22,0	89,0
TL144-14M-115	144	9A	GG	4040	638,92	641,71	230,0	600,0	-	133,0	15,5	102,0
TL168-14M-115	168	9A	GG	4040	745,87	748,66	230,0	706,0	-	133,0	15,5	102,0
TL192-14M-115	192	9A	GG	4040	852,82	855,62	230,0	813,0	-	133,0	15,5	102,0
TL216-14M-115	216	9A	GG	4040	959,76	962,57	230,0	920,0	-	133,0	15,5	102,0
TL264-14M-115	264	9A	GG	5050	1173,66	1176,47	270,0	1133,0	-	133,0	3,0	127,0

Bestellbeispiel

			Zähnezahl 48
			Riementeilung 14 mm
TL48	14 M	85	Riemenbreite 85 mm