
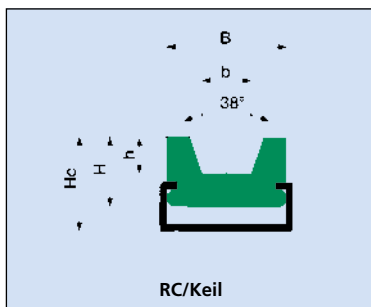


Riemenführungen

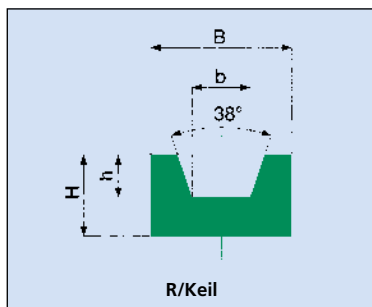


Artikel-Nr. Ketten Fuchs	B	H	b	h
R 8 F	20,0	10,0	6,0	3,5
R 10 Z	20,0	10,0	7,2	4,5
R 13 A	20,0	12,0	9,2	6,0
R 17 B	30,0	15,0	11,5	8,0
R 20 G	30,0	20,0	13,5	9,0
R 22 C	35,0	20,0	14,5	10,5
R 25 H	40,0	25,0	16,5	12,0
R 32 D	50,0	30,0	21,0	16,0
R 40 E	60,0	35,0	26,0	21,0

Typ
R/Keil

Artikel-Nr. Ketten Fuchs	B	H	b	h	Hc	C-Profil
R 8 F C	20,0	10,0	6,0	3,5	15,0	C-2010
R 10 Z C	20,0	15,0	7,2	4,5	18,0	C-2010
R 13 A C	25,0	18,0	9,2	6,0	22,0	C-2812
R 17 B C	30,0	18,0	11,5	8,0	24,0	C-2812
R 20 G C	30,0	18,0	13,5	9,0	24,0	C-2812
R 22 C C	35,0	25,0	14,5	10,5	30,0	C-3818
R 25 H C	40,0	25,0	16,5	12,0	32,0	C-3818
R 32 D C	60,0	35,0	21,0	16,0	40,0	C-6020
R 40 E C	60,0	35,0	26,0	21,0	40,0	C-6020

Typ
RC/Keil

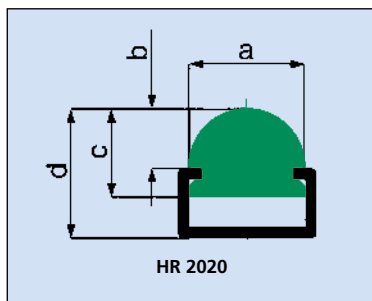

Artikel-Nr. Ketten Fuchs	a	b	c	D
HR 2020	20,0	10,0	15,0	20,0

Geländer-
führung
Typ
HR 2020

Standardlänge: 2000 mm. Auf Wunsch jede Stärke und Länge lieferbar.
Weitere Kettenführungen, sowie Riemenführungen auf Anfrage.