


Kegelräder

Artikel-Nr. Ketten Fuchs	Modul	Zähne- zahl	Abmessungen in mm							
			de	dp	A	F	Dn	D1	dm	Lm
420-010-116B	1,0	16	17,4	16,00	11,20	4,0	13,3	4,0	16,00	6,5
420-010-119B	1,0	19	20,4	19,00	11,80	4,0	15,3	4,0	18,00	6,5
420-010-122B	1,0	22	23,4	22,00	12,80	4,7	16,3	5,0	20,00	6,5
420-010-126B	1,0	26	27,4	26,00	13,30	5,5	20,3	5,0	22,00	7,0
420-010-130B	1,0	30	31,4	30,00	16,00	6,4	20,3	5,0	26,00	8,0
420-015-116B	1,5	16	26,1	24,00	18,90	6,0	20,3	8,0	26,00	12,0
420-015-119B	1,5	19	30,6	28,50	21,30	7,0	20,3	8,0	30,00	12,0
420-015-122B	1,5	22	35,1	33,00	22,50	7,5	25,3	8,0	33,00	12,0
420-015-126B	1,5	26	41,1	39,00	23,20	8,5	28,3	8,0	36,00	12,0
420-015-130B	1,5	30	47,1	45,00	27,20	10,0	30,3	12,0	42,00	12,0
420-020-116B	2,0	16	34,8	32,00	23,50	8,0	25,3	8,0	33,00	14,0
420-020-119B	2,0	19	40,8	38,00	24,20	9,0	25,3	8,0	36,00	12,0
420-020-122B	2,0	22	46,8	44,00	27,90	10,0	30,3	12,0	42,00	14,0
420-020-126B	2,0	26	54,8	52,00	31,40	12,0	35,3	12,0	48,00	14,0
420-020-130B	2,0	30	62,8	60,00	34,10	13,0	40,3	14,0	54,00	17,0
420-025-116B	2,5	16	43,5	40,00	28,10	10,0	30,3	12,0	40,00	15,0
420-025-119B	2,5	19	51,0	47,50	27,10	11,0	35,3	12,0	42,00	13,0
420-025-122B	2,5	22	58,5	55,00	30,10	12,0	45,3	16,0	48,00	16,0
420-025-126B	2,5	26	68,5	65,00	33,20	15,0	45,3	16,0	54,00	16,0
420-025-130B	2,5	30	78,5	75,00	39,00	16,0	50,3	16,0	64,00	20,0
420-030-116B	3,0	16	52,5	48,00	31,70	12,0	40,3	12,0	46,00	18,0
420-030-119B	3,0	19	61,2	57,00	36,00	13,0	40,3	14,0	54,00	17,0
420-030-122B	3,0	22	70,2	66,00	36,90	15,0	50,3	16,0	58,00	17,0
420-030-126B	3,0	26	82,2	78,00	38,40	17,0	50,3	16,0	64,00	18,0
420-030-130B	3,0	30	94,2	90,00	43,80	19,0	60,3	20,0	74,00	22,0
420-035-116B	3,5	16	60,9	56,00	36,40	14,0	45,3	16,0	53,00	20,0
420-035-119B	3,5	19	71,5	66,50	37,80	15,0	50,3	18,0	58,80	19,0
420-035-122B	3,5	22	81,9	77,00	39,10	17,0	55,3	20,0	64,00	18,0
420-035-126B	3,5	26	96,0	91,00	43,35	20,0	62,3	20,0	73,05	20,0
420-035-130B	3,5	30	110,0	105,00	47,10	23,0	70,3	20,0	82,00	22,0
420-040-116B	4,0	16	69,7	64,00	44,30	15,0	50,3	16,0	64,00	25,0
420-040-119B	4,0	19	81,7	76,00	44,40	18,0	55,3	20,0	68,00	22,0
420-040-122B	4,0	22	93,7	88,00	45,90	20,0	60,3	20,0	74,00	22,0
420-040-126B	4,0	26	109,7	104,00	48,00	25,0	70,3	20,0	82,00	22,0
420-040-130B	4,0	30	125,7	120,00	54,20	26,0	80,3	20,0	94,00	25,0
420-045-116B	4,5	16	78,4	72,00	46,30	17,5	55,3	20,0	68,00	25,0
420-045-119B	4,5	19	91,8	85,50	49,00	20,0	62,3	20,0	75,57	25,0
420-045-122B	4,5	22	105,3	99,00	50,10	22,0	70,3	20,0	82,00	25,0
420-045-126B	4,5	26	123,0	117,00	54,70	25,0	75,3	20,0	93,30	26,0
420-045-130B	4,5	30	141,4	135,00	60,00	29,0	80,3	20,0	105,00	28,0
420-050-116B	5,0	16	87,1	80,00	48,90	18,0	60,3	20,0	74,00	25,0
420-050-119B	5,0	19	102,1	95,00	52,20	22,0	60,3	20,0	82,00	25,0
420-050-122B	5,0	22	117,1	110,00	58,20	24,0	80,3	20,0	94,00	30,0
420-050-126B	5,0	26	137,1	130,00	62,70	29,0	80,3	20,0	105,00	30,0
420-050-130B	5,0	30	157,1	150,00	68,90	32,0	80,3	20,0	119,00	35,0

Standard-Kegelräder Typ B

gerade verzahnt 90°
Eingriffswinkel 20°

Übersetzungsverhältnis 1:1

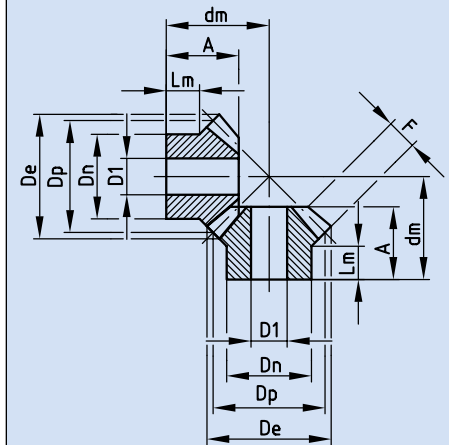

Material: C 43